



# USING THE FAST-FIT BRACKET

## TO FIT THE BRACKET

Carefully hammer the supplied fixing pin to the wall, through the central hole in the bracket.

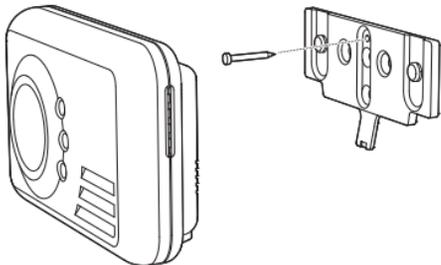


Hook the alarm onto the locating pegs on the bracket and clip down into position. The alarm is now locked onto the bracket.

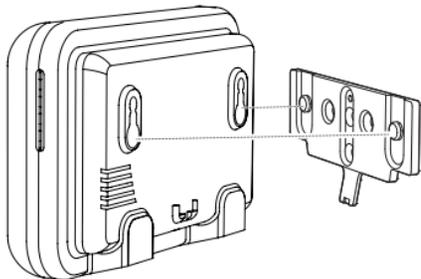

## TO REMOVE THE ALARM FROM THE BRACKET

To remove the alarm, insert a small, flathead screwdriver underneath the alarm, between the alarm and the centre of the wall bracket. By doing so you will lift the tab lock away from the alarm.

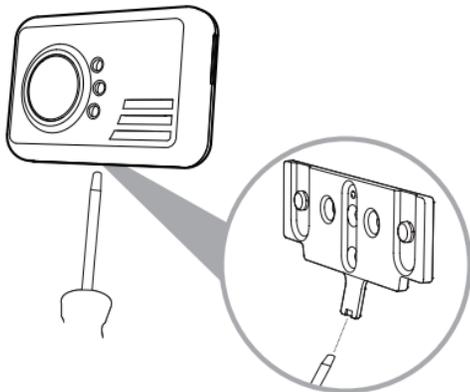

With the screwdriver in place you should now be able to detach the alarm by sliding it up and off the bracket.

**Note to installer:** Please destroy this slip after activating locking facility to prevent unauthorised removal.