


## CO-9D BATTERY POWERED CO ALARM

<b>Sensor type</b>	Advanced electrochemical
<b>Battery type</b>	7 year sealed for life lithium



- Advanced electrochemical sensor calibrated and tested in CO gas.
- 7 year sealed for life lithium battery.
- Unique digital LCD screen.
- The alarm has a built in room temperature indicator with a range of +-2 degrees.
- Shows the peak levels of CO detected over a 4 week period.
- Can be free-standing or wall mounted.
- Test button - to test circuitry and sounder.
- End of life indication.

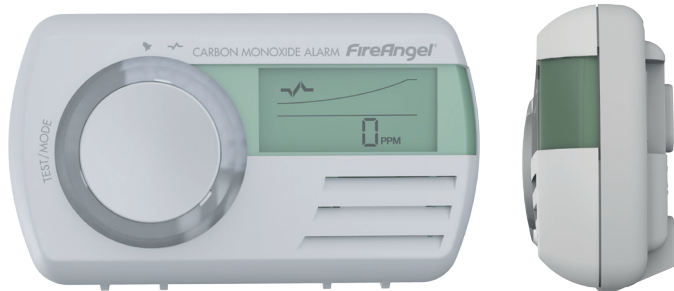

BS EN50291-1:2010+A1:2012  
BS EN50291-2:2010  
Licence No: KM 551504

## Technical Specification

<b>Dimensions</b>	125mm (width) x 72mm (height) x 40mm (depth)	
<b>Supply voltage</b>	3V DC	
<b>Battery</b>	7 year sealed for life lithium battery	
<b>Technology</b>	Advanced electrochemical	
<b>Alarm sound level</b>	85dB(A) at 1m (minimum)	
<b>Installation positions</b>	Wall / Free-standing	
<b>Operating temperature</b>	-10°C to +40°C	
<b>Operating humidity</b>	30% to 90% RH non-condensing	
<b>Storage temperature</b>	-20°C to +60°C	
<b>Storage humidity</b>	30% to 90% RH non-condensing	
<b>Plastic material</b>	ABS, UL94 VO fire retardant	
<b>Warranty</b>	7 years	
<b>Weight</b>	118g	
<b>Certified to</b>	BS EN50291-1:2010+A1:2012 and BS EN50291-2:2010	
<b>Independently tested to</b>	N/A	
<b>Maximum number of connected units</b>	N/A	
<b>Operating Frequency</b>	N/A	
<b>Range</b>	N/A	